TRIECA CONFERENCE

LECA Great Lakes Chapter

Toronto and Region Conservation for The Living City

Thank you to all of our 2015 sponsors:

AQUATECH DEWATERING COMPANY

Lake Simcoe Region Conservation Authority

CVC Credit Valley Conservation

GEMS

RM CONSTRUCTION

DYNEX CONSTRUCTION INC Since 1989

filtrexx CANADA SUSTAINABLE TECHNOLOGIES let nature do it.

GEOSTORM

Holland Pioneers in international business

Geosyntec consultants

NILEX CIVIL ENVIRONMENTAL GROUP Unearthing better results.

terrafix geosynthetics inc.

UNILOCK

VERDYOL Biotic Earth AN ORGANIC APPROACH TO SOIL BUILDING

York Region

Canada Green Building Council – Conseil du bâtiment durable du Canada – Chapter – Greater Toronto

Media Partner

WATER CANADA THE COMPLETE WATER MAGAZINE

Urban Stream Restoration and Applied Practices

Jonathan Koepke, CPESC, LEED-AP
Vice President, General Manager

ENCAP
INCORPORATED

Streambank Stabilization Practices

Presentation Outline

- Principles of Streambank Stabilization Practices
- Stream Stabilization Efforts and Philosophies in Northeast Illinois
- Grade Stabilization, Armoring & Structural Practices*
- Vegetative Practices
- Combined Structural Practices and Vegetative Stabilization Techniques
- Conclusions

* With a minor vegetative component

Principles of Fluvial Geomorphology

A Very Quick Review

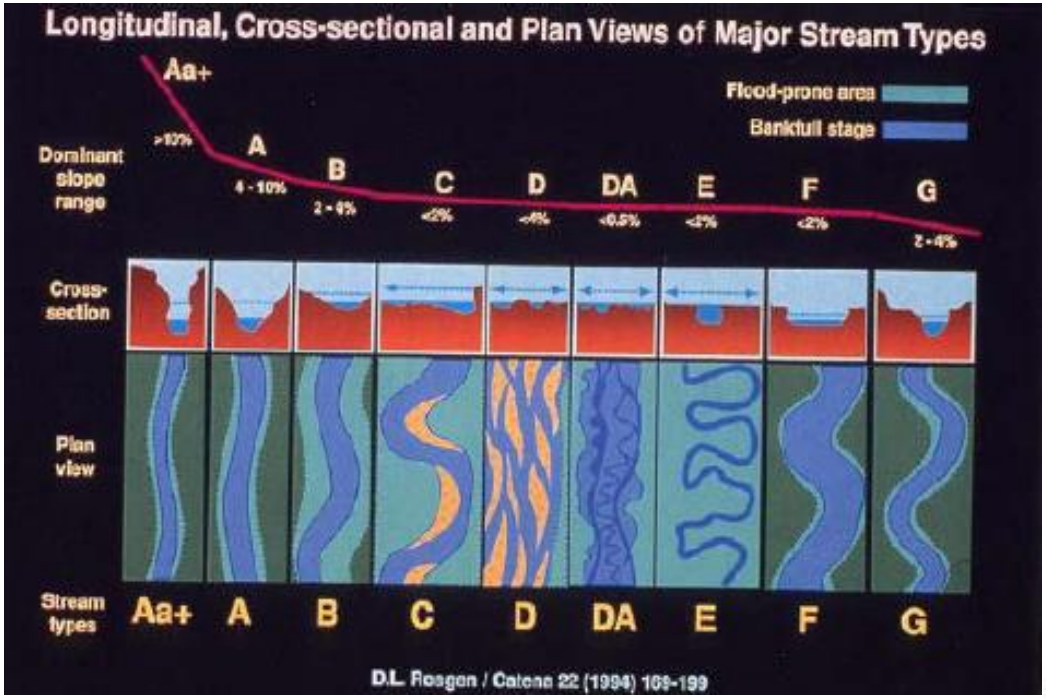

The Rosgen Chart

Channel Evolution Model

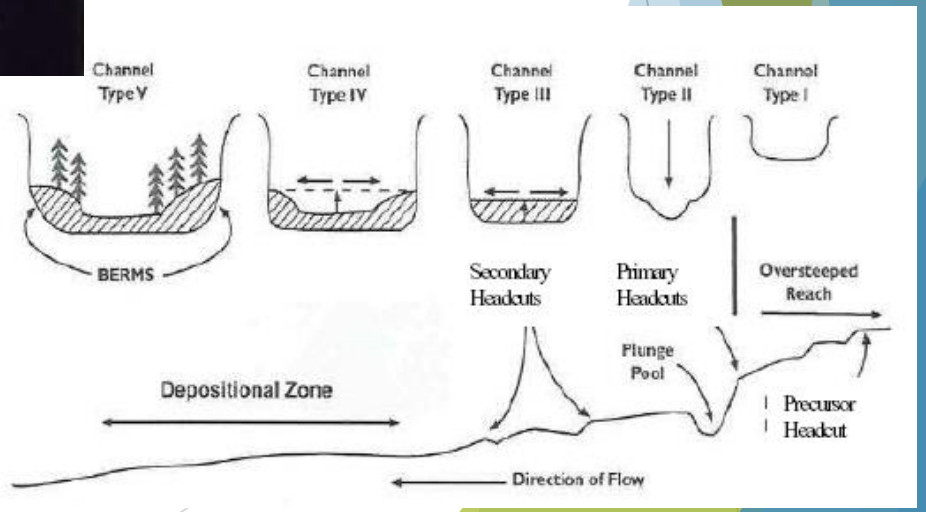

Principles of Fluvial Geomorphology

A View of Streambank Erosion

What exactly is “dynamic equilibrium”?

- Streams are inherently complex systems
- Relationships between a variety of variables result in the visible characteristics of a stream’s bed and banks
- Changes in the “independent” variables that influence a stream result in changes in the “dependent” characteristics of the stream.
  - Independent Variables = Watershed Characteristics, e.g. discharge, soils, sediment load, climate, etc.
  - Dependent Variables = Stream Characteristics, e.g. channel slope, width, depth, pattern, etc.
- The more drastic the alteration to the independent variables, the more dramatic the visible changes in the dependent variables.
- As changes take place in the inputs to the stream, the stream alters itself through natural processes to accommodate for the new flow characteristics
- A stream is naturally working toward “dynamic equilibrium” as it erodes itself a new, more stable pattern due to changes in its watershed.
- A stream in dynamic equilibrium has reached a state of natural stability when it can convey it’s flows and sediment load without significant erosion

Fluvial Geomorphology and Streambank Stabilization Design Principles

A Very Quick Review

"Natural Channel Design"

- Analog Design Method
- Empirical Design Method
- Analytical Design Method

Stream(bank) Stabilization and Riparian Restoration in Northeast Illinois

- Modifications to Stream Channel and Contributing Watershed
  - Agricultural Impacts
  - Urbanization
- Incised Streams with Severe Bed Erosion and Downcutting
  - Signified by Head Cut Migration
  - Steep, nearly vertical banks
  - Disconnection from historic floodplain

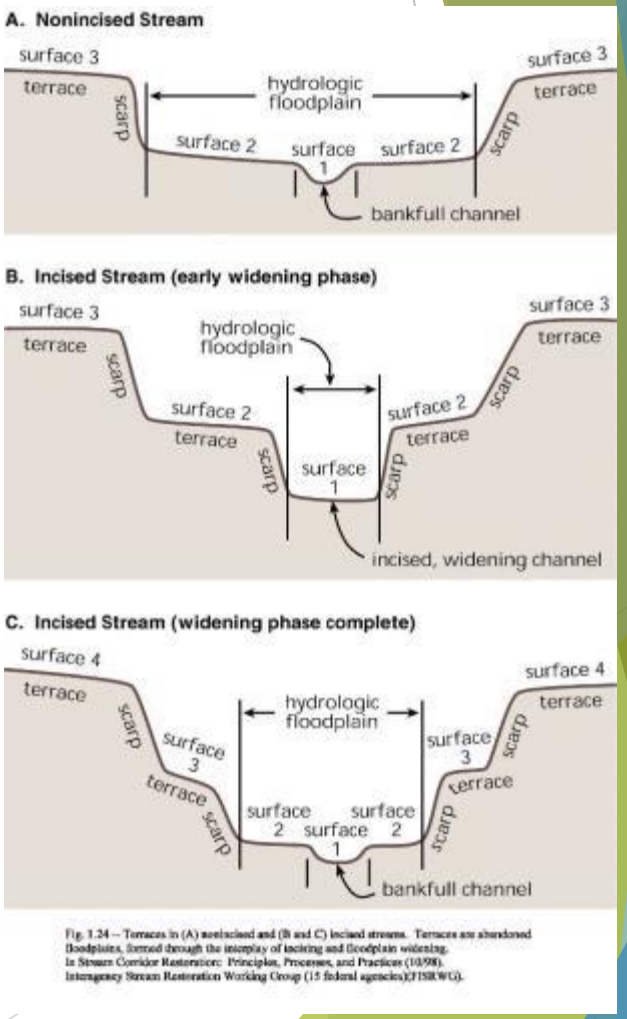

Fig. 1.24 – Terraces in (A) nonincised and (B and C) incised streams. Terraces are abandoned floodplains, formed through the interplay of incising and floodplain widening.
In Stream Corridor Restoration: Principles, Processes, and Practices (10/98).
Interagency Stream Restoration Working Group (15 federal agencies)(FISRWG).

Stream Stabilization and Riparian Restoration in Northeast Illinois

- Modifications to Stream Channel and Contributing Watershed

Agricultural Impacts

Stream Stabilization and Riparian Restoration in Northeast Illinois

- Modifications to Stream Channel and Contributing Watershed

Agricultural Impacts

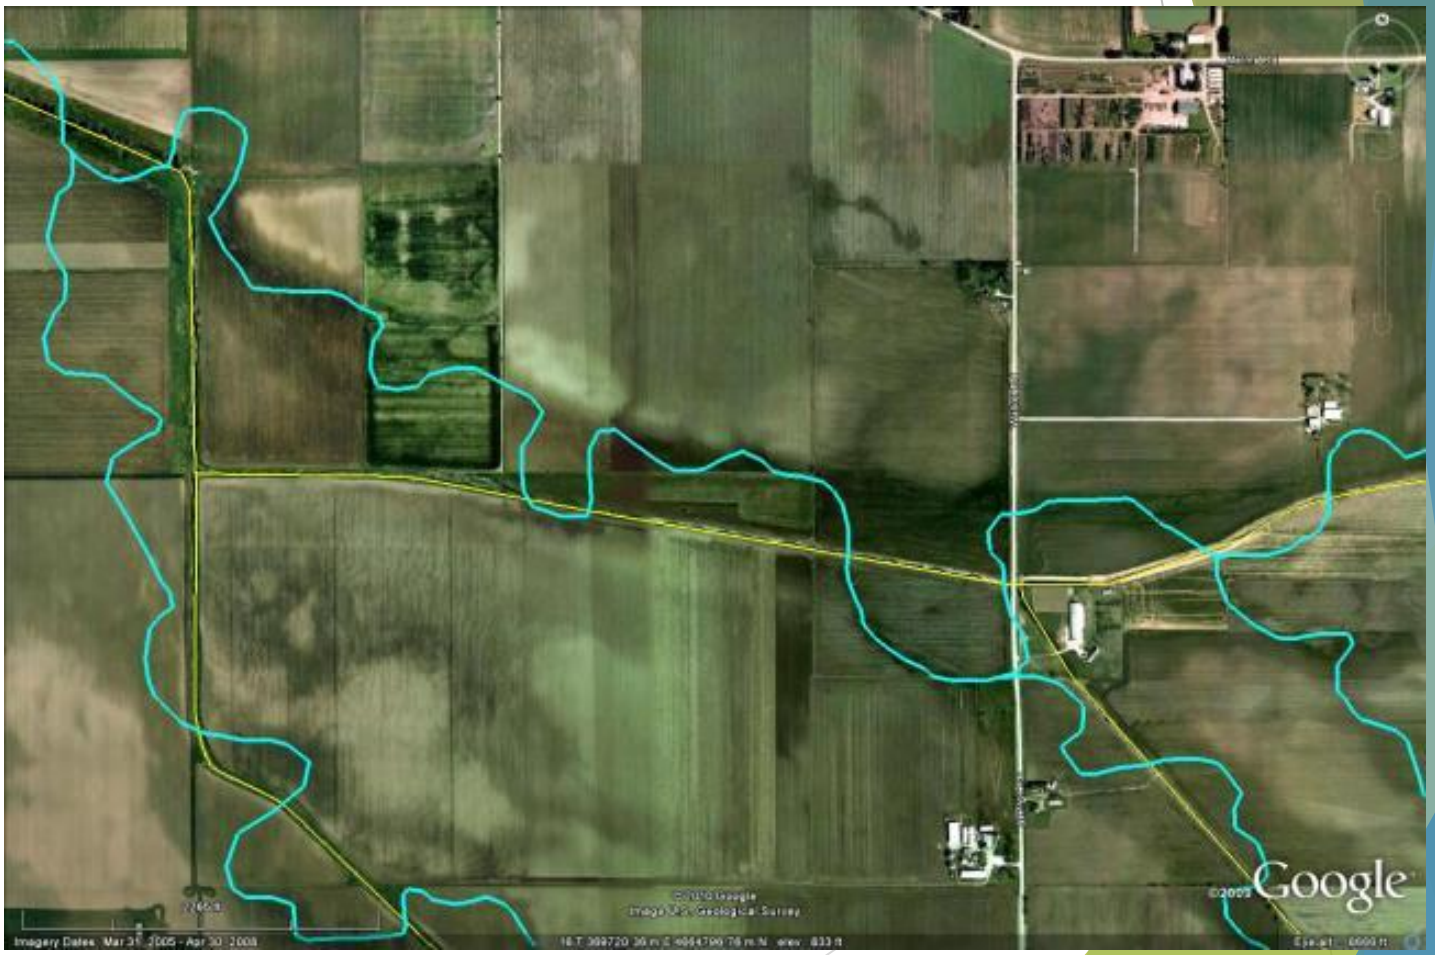

Stream Stabilization and Riparian Restoration in Northeast Illinois

- Modifications to Stream Channel and Contributing Watershed

Agricultural Impacts

Stream Stabilization and Riparian Restoration in Northeast Illinois

- Modifications to Stream Channel and Contributing Watershed

Urbanization

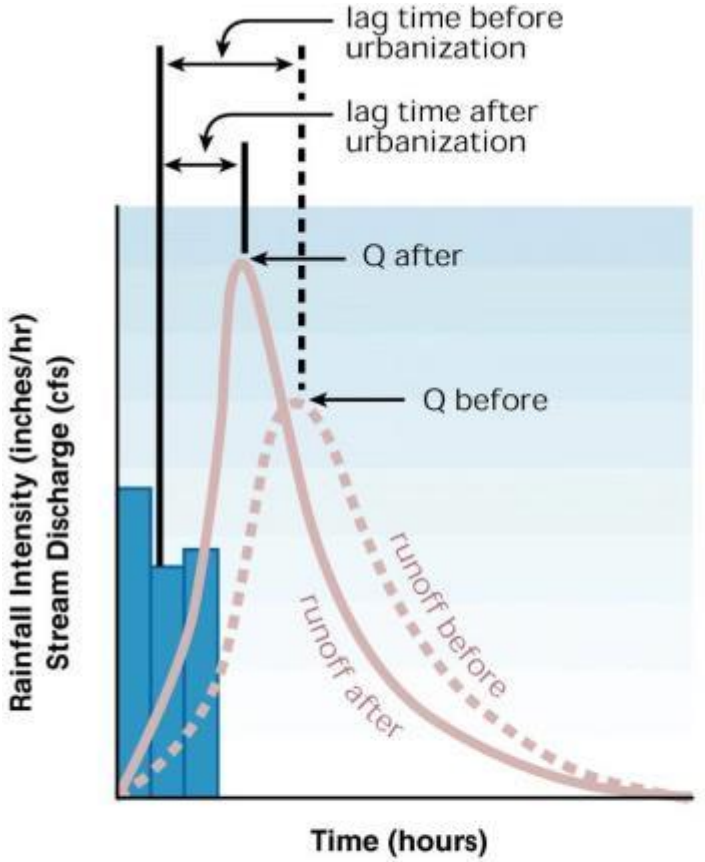

Fig. 1.15 -- A comparison of hydrographs before and after urbanization. The discharge curve is higher and steeper for urban streams than for natural streams.
In Stream Corridor Restoration: Principles, Processes, and Practices (10/98).
Interagency Stream Restoration Working Group (15 federal agencies)(FISRWG).

Stream Stabilization and Riparian Restoration in Northeast Illinois

- Modifications to Stream Channel and Contributing Watershed

Urbanization

Stream Stabilization and Riparian Restoration in Northeast Illinois

- Modifications to Stream Channel and Contributing Watershed

Urbanization

Stream Stabilization and Riparian Restoration in Northeast Illinois

- Modifications to Stream Channel and Contributing Watershed

Urbanization

Stream Stabilization and Riparian Restoration in Northeast Illinois

Strategies to Address Incised Streams

1. Reconnect stream with historic floodplain
2. Recreate new floodplain between historic floodplain and the elevation of the incised streambed
3. Modify existing channel type and dimensions at existing streambed
4. Stabilize banks in place

What exactly are we attempting to “treat”?

Stream Stabilization Practices

A practice that misses the overall picture of stream dynamics is destined for failure

- Bed Stabilization Vs. Bank Stabilization
- What about the riparian corridor?
- Vegetative Regimes?

What is happening to our stream and our stabilization practices?

Stream Stabilization Practices

A practice that misses the overall picture of stream dynamics is destined for failure

- Bed Stabilization Vs. Bank Stabilization
- What about the riparian corridor?
- Vegetative Regimes?

Are we counting on vegetation here to stabilize the banks?

Did we confine our channel?

Stream Stabilization Practices

Selected Projects Highlight Common Issues in Ravine & Stream Stabilization

- "Debate" on applicability of hard armoring versus soft armoring (bioengineering) practices for stream restoration in Chicago Region
  - Many permitting authorities have been pushing "soft" approaches over the last decade
  - Rip rap viewed as "unnatural" and vegetation alone is used for permanent stabilization
- Stream channelization and urbanization of watersheds have presented visible bank erosion, but typically stream restoration and stabilization practices have been designed "property line to property line"
- How do you reach "dynamic equilibrium" within watersheds that by their construction are not geomorphically "dynamic"?

Grade Stabilization, Armoring, & Structural Practices

- Gabions, Rip Rap, and Other Bank Protection and Armoring Used to Hold Stream Banks in Place
- Grade Control Structures, Riffle Construction, and Step Pools Constructed to hold stream bed and stream profile in place or raise elevation of streamflow to compensate for lost stream length

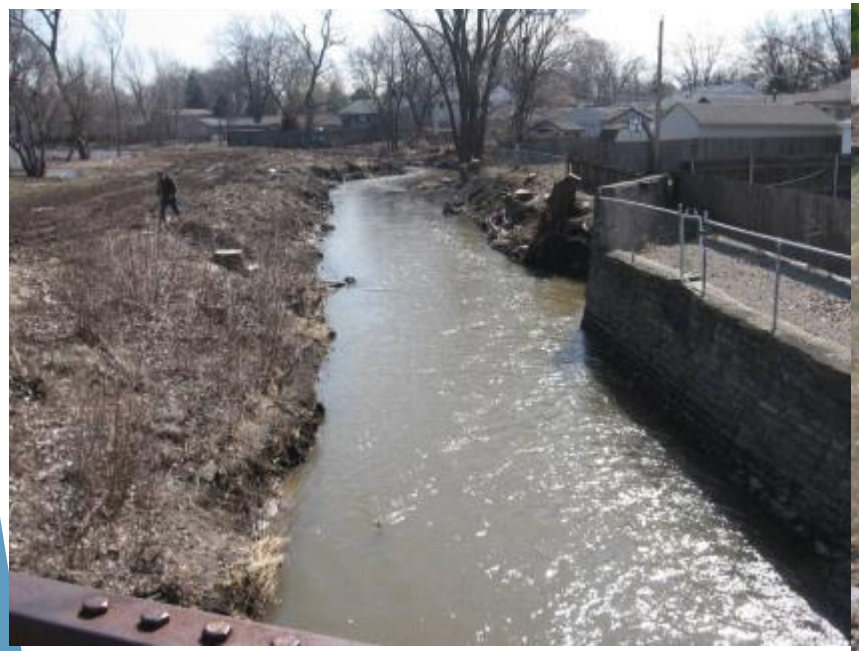

Grade Stabilization, Armoring, & Structural Practices

- Gabions, Rip Rap, and Other Bank Protection and Armoring Used to Hold Stream Banks in Place – ASSUMES STABLE STREAMBED!!!

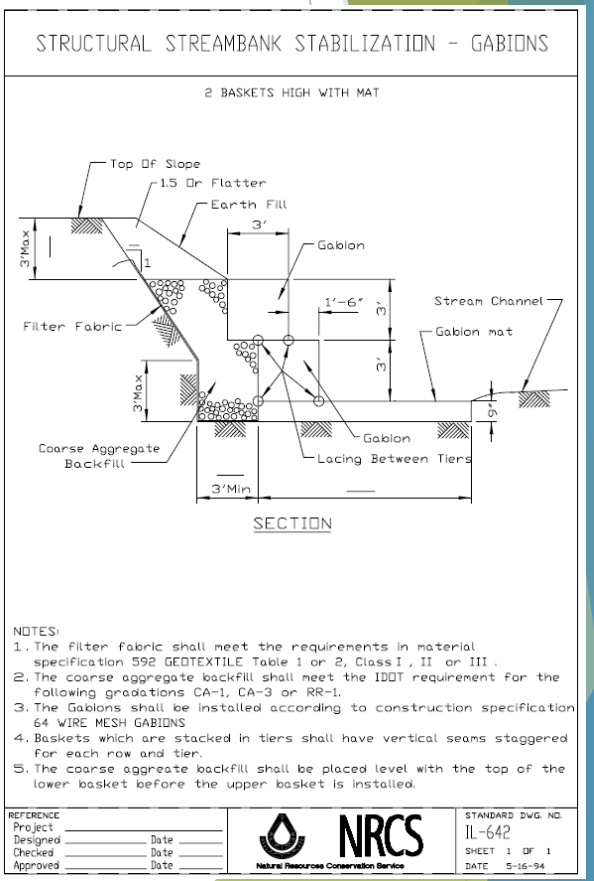

Vegetative Streambank Restoration

- Relies primarily on vegetation alone to stabilize banks on the long term
- May be utilitze with bioengineering practices and temporary erosion control practices to establish vegetation
- Selection of species, establishment methods, and maintenance is critical to success of project

Vegetative Bank Stabilization

Keys to Successful Efforts

- Utilize manufacturers' data and design software to select appropriate blanket for soil and slope conditions
- Learn from failure (It's even better when it is someone else's)
- Stabilization efforts should take into account drainage inputs from off-site and conditions of existing resource
- Select appropriate vegetation based on hydrology and sunlight regime

Combined Structural & Vegetative Stabilization Techniques

- Blend of Hard Armoring and Vegetative Practices
- Most structural practices rely on dissipating energy and reducing velocity in streamflow rather than diverting or redirecting it further downstream
- Design relies on structural measures to control thalweg and reduce energy and sheer stress at banks to promote deposition and vegetation development
- Extension of stabilization techniques outside of banks into the riparian zone improves long term stabilization and restoration efforts

Combined Structural & Vegetative Stabilization Techniques

- Some Practices Include:
  - Stream Barbs/Bendway Weirs
  - Rootwad Revetments
  - Longitudinal Peak Stone Toe Protection
  - Riffle Construction
  - Bank Reshaping
  - Clearing and Planting

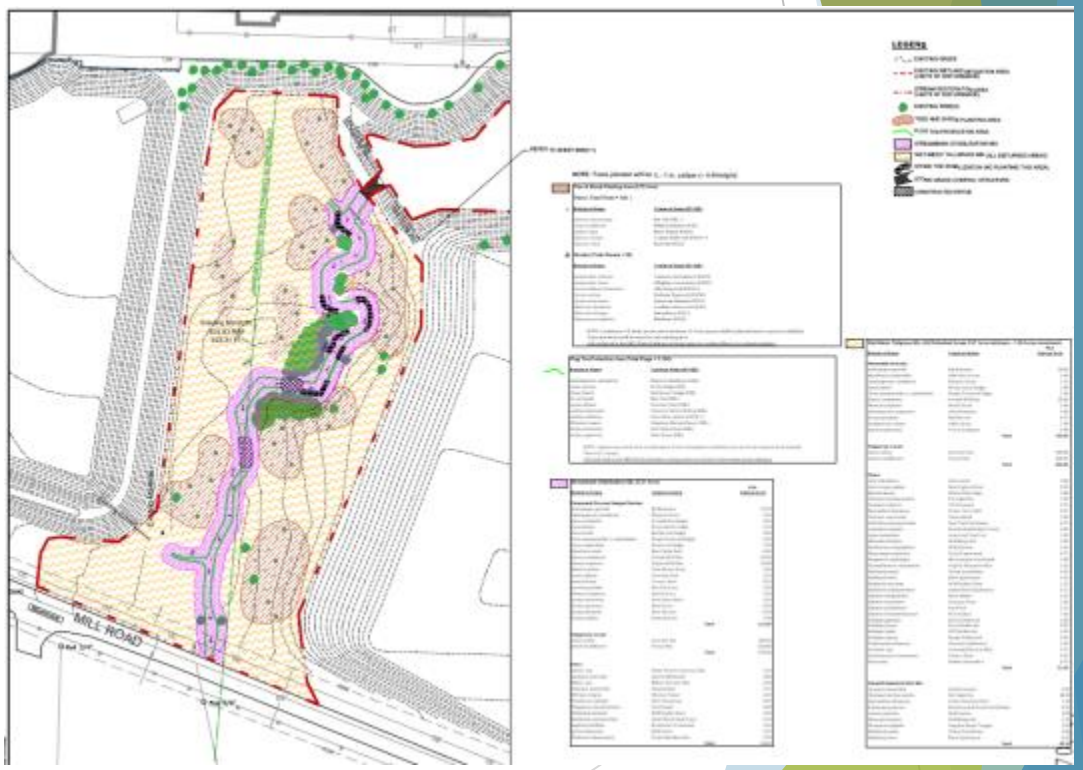

Stream Barbs / Bendway Weirs

- Purpose of Practice:
  - Control Meander Migration
  - Center Thalweg
  - Reduce Energy at bank
  - Control Energy within treatmen t reach

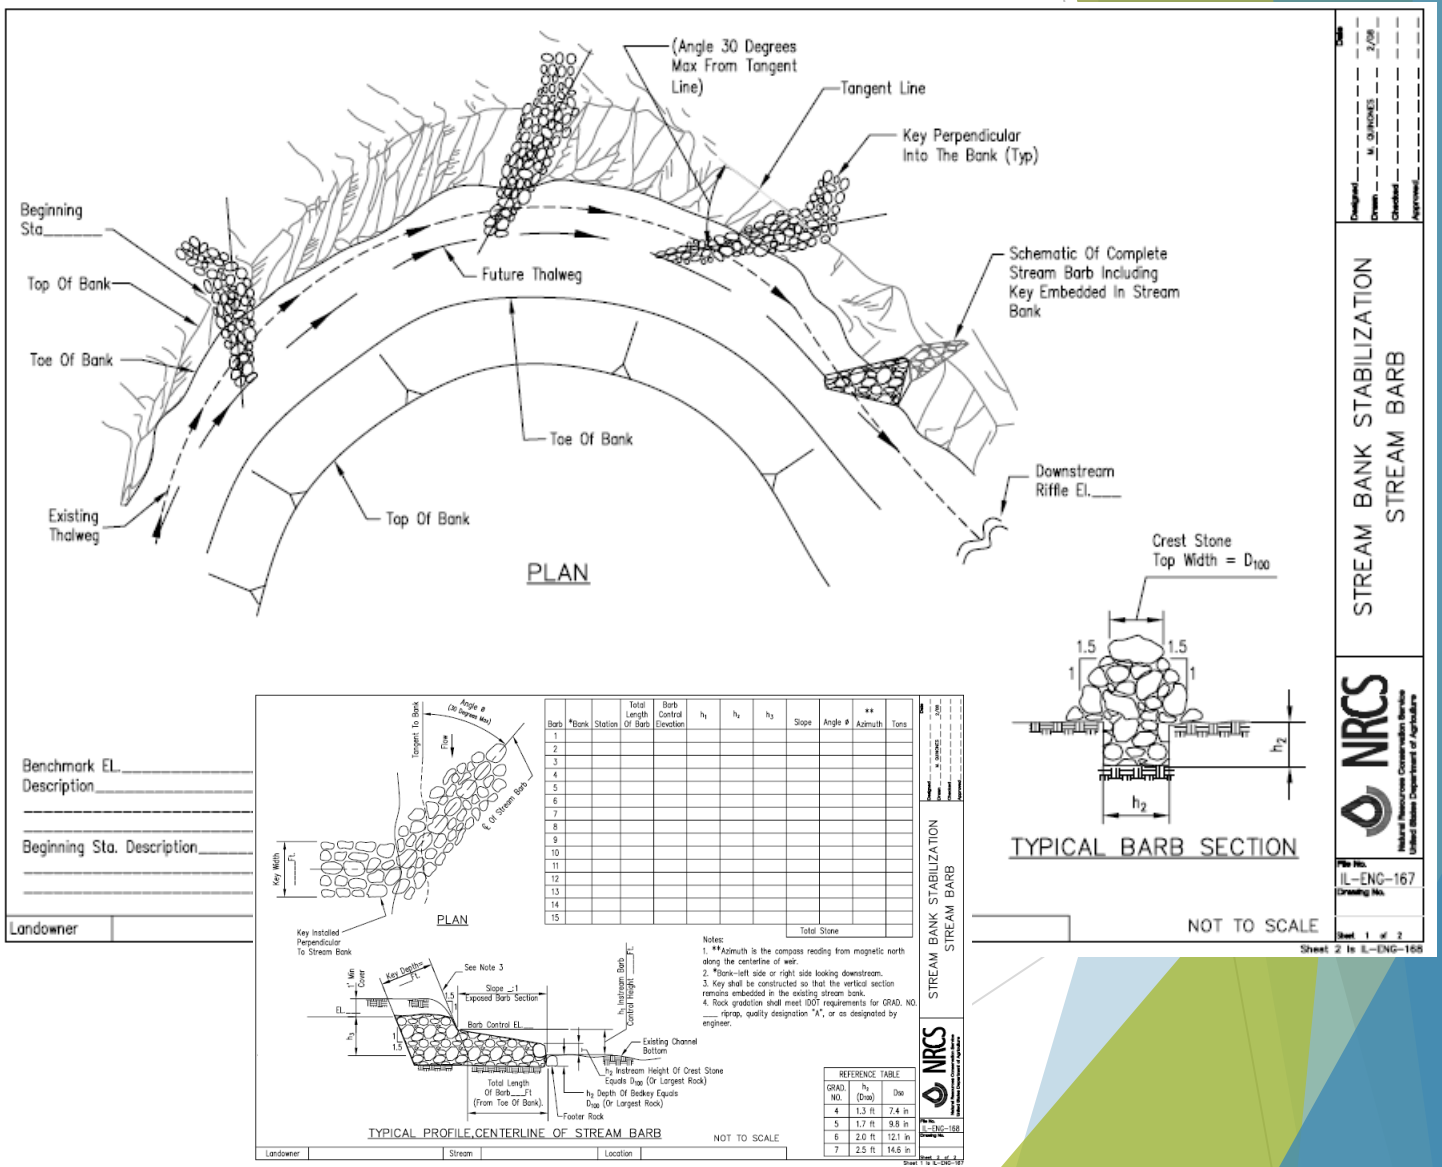

Stream Barbs / Bendway Weirs

- Keys to Practice Installation:
  - Stone Sizing per Spec
  - Key into bank
  - Use of crest stone and anchor
  - Proper upstream angle per plan

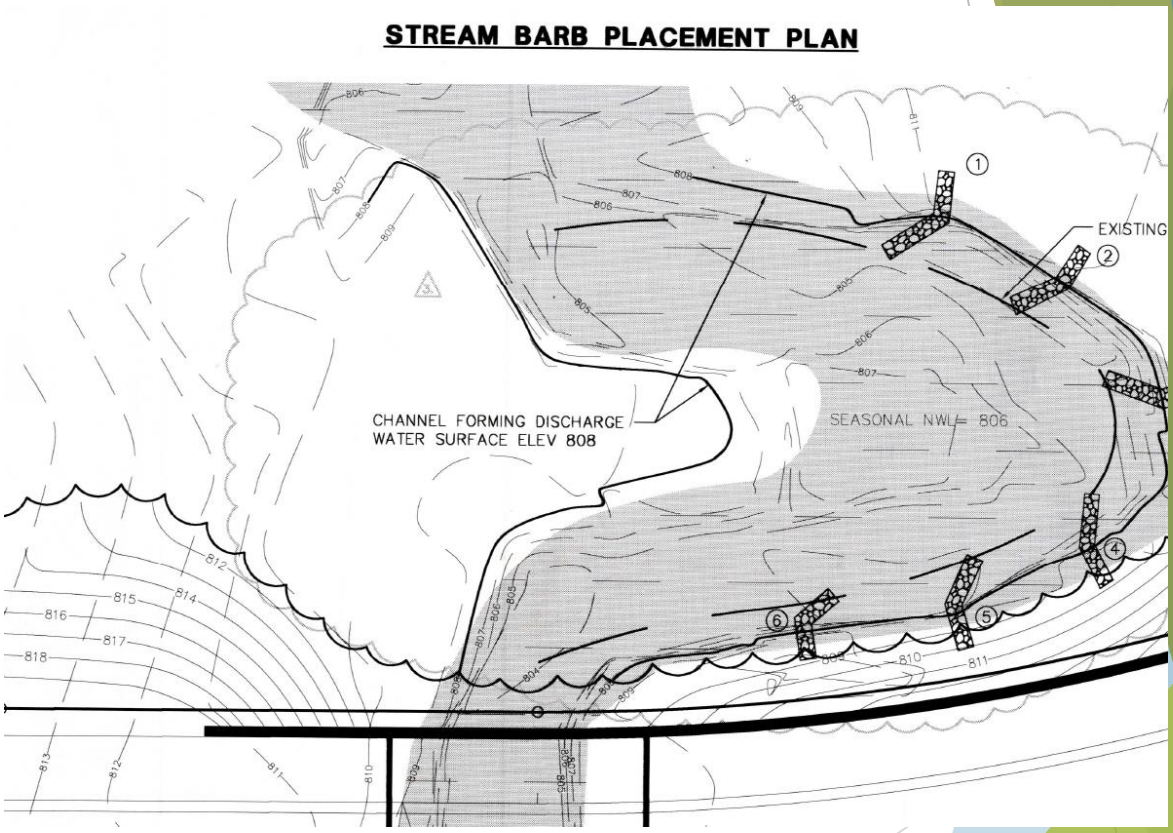

Stream Barbs / Bendway Weirs

Stream Barbs / Bendway Weirs

Base Flow Conditions

Stream Barbs / Bendway Weirs

Approximate Bankfull

Stream Barbs / Bendway Weirs

Approximate Bankfull after 50-Year Flood Event

Rootwad Revetment

- Purpose of Practice:
  - Control Meander Migration
  - Center Thalweg
  - Reduce Energy at bank
  - Control Energy within treatment reach

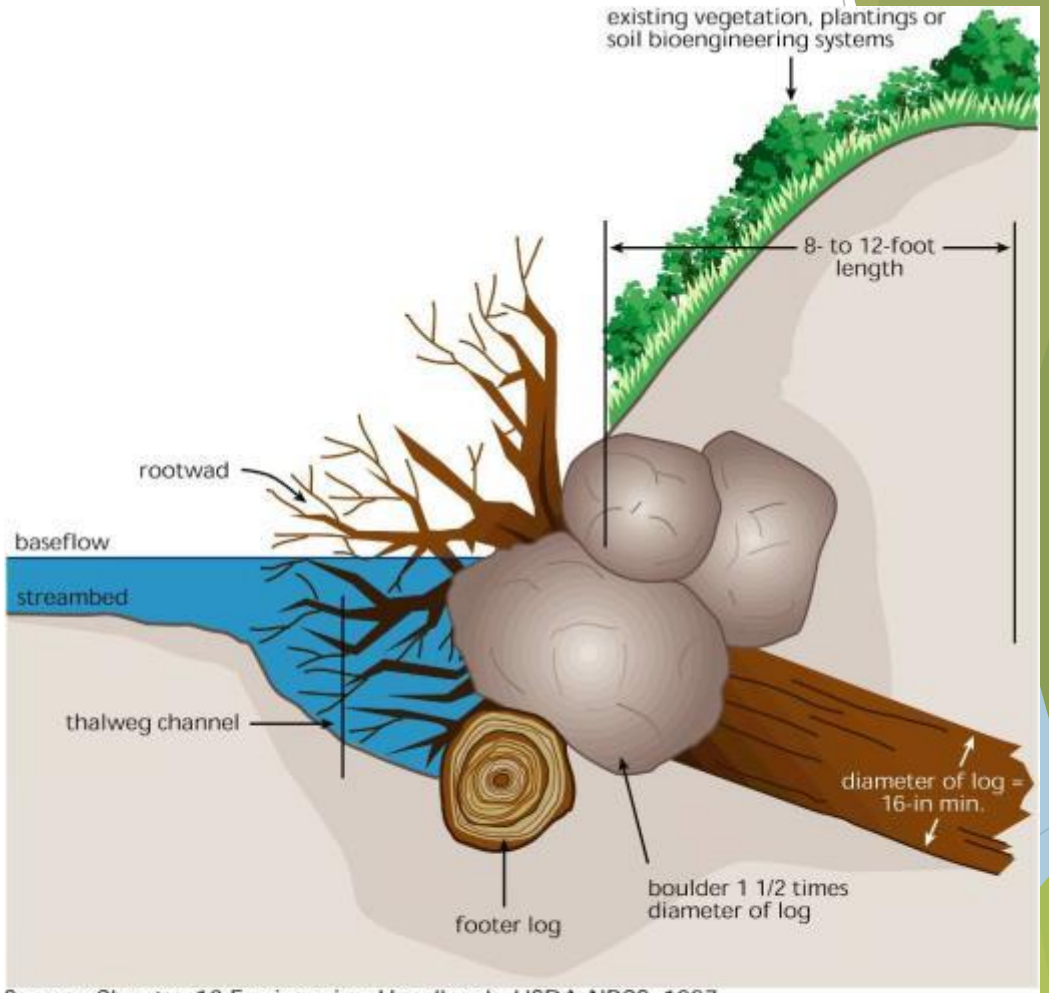

Source: Chapter 16 Engineering Handbook, USDA-NRCS, 1997.

Fig. 8.42 -- Revetment systems. Details of rootwad and boulder technique.
In Stream Corridor Restoration: Principles, Processes, and Practices, 10/98.
Interagency Stream Restoration Working Group (FISRWG)(15 Federal agencies of the US).

Rootwad Revetment

- Purpose of Practice:
  - Control Meander Migration
  - Center Thalweg
  - Reduce Energy at bank
  - Control Energy within treatment reach

Longitudinal Peak Stone Toe Protection

- Purpose of Practice:
  - Control Meander Migration
  - Narrow channel slightly
  - Allow bank to slough or deposition to occur behind structure and revegetate
  - Control Energy within treatment reach

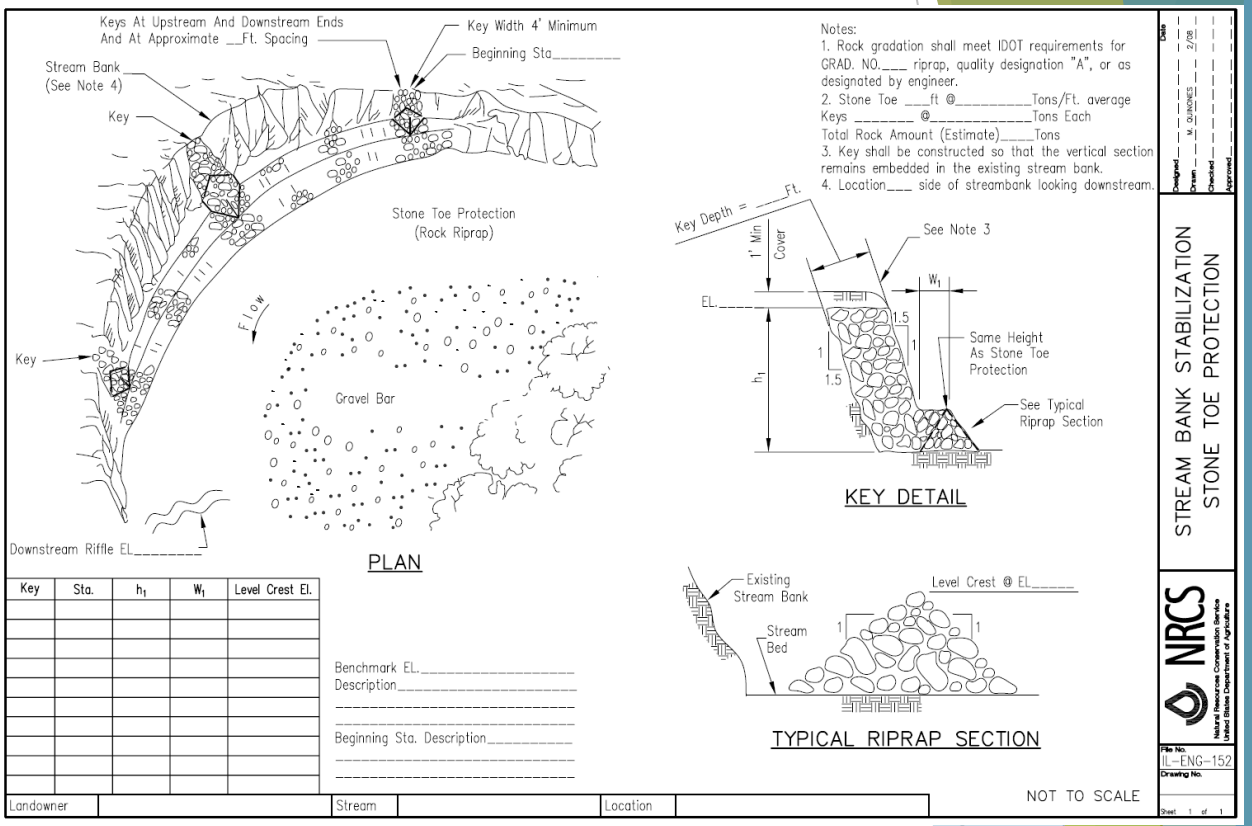

Longitudinal Peak Stone Toe Protection

- Purpose of Practice:
  - Control Meander Migration
  - Narrow channel slightly
  - Allow bank to slough or deposition to occur behind structure and revegetate
  - Control Energy within treatment reach

Riffle Construction

- Purpose of Practice:
  - Provide grade control
  - Stream structure
  - Provides additional habitat
  - Control energy within treatment reach

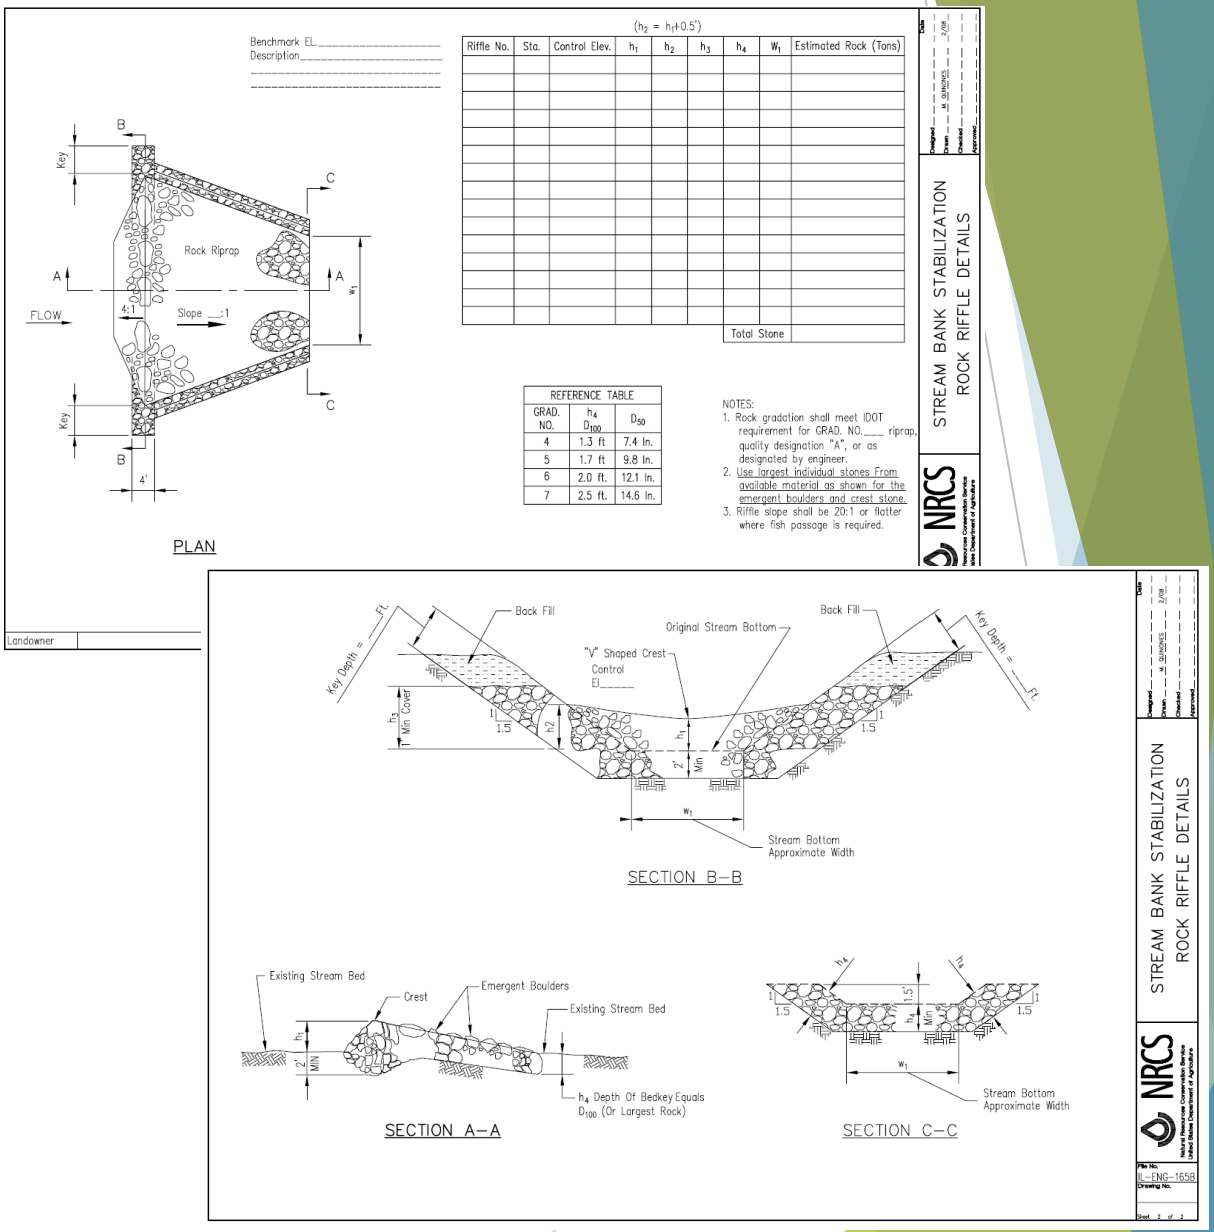

Riffle Construction – Bank Reshaping – Clearing and Planting

- Case Study in Mixed Natural Design Urban Stream and Riparian Corridor Restoration:
  - Invasive Species Removal
  - Rock Riffle Construction
  - Bank Reshaping
  - Stone Toe Protection
  - Plug Toe Protection
  - Erosion Blanketing

Riffle Construction – Bank Reshaping – Clearing and Planting

- Project Background
  - Highly urbanized watershed
  - Stream corridor dominated by invasive and woody adventive species
  - Rapidly variable stream flows
  - Significant stream incision
  - Small sized watershed

Site Photos Prior to Clearing

Combined Practice Project

After Clearing

Combined Practice Project Detail

- Rock Riffle Construction

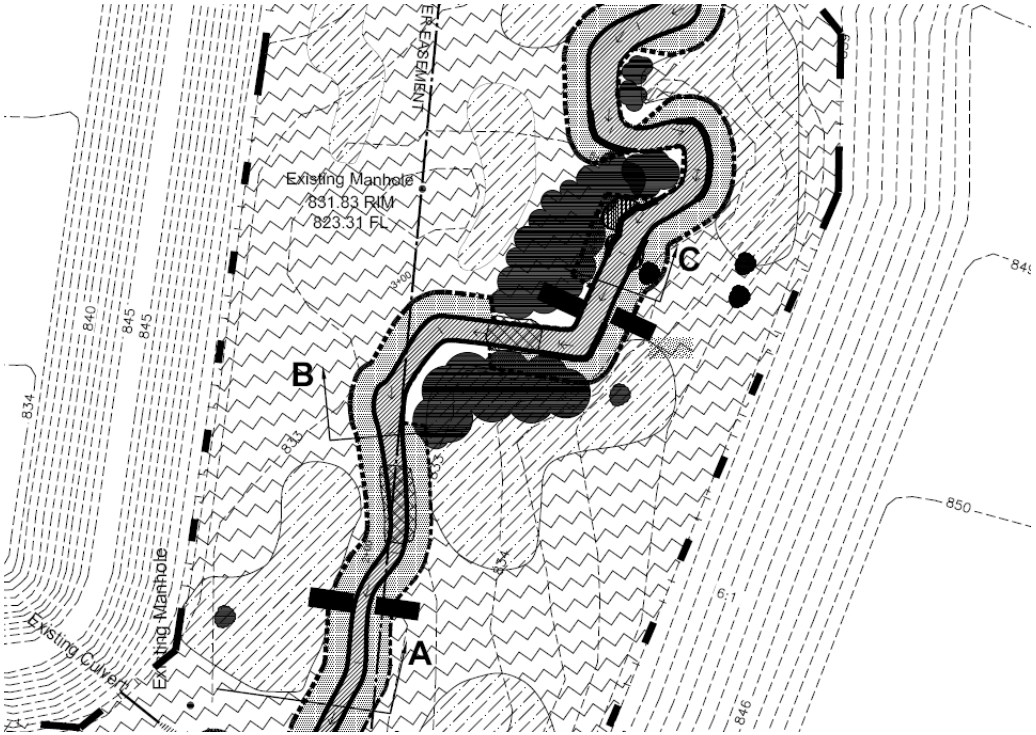

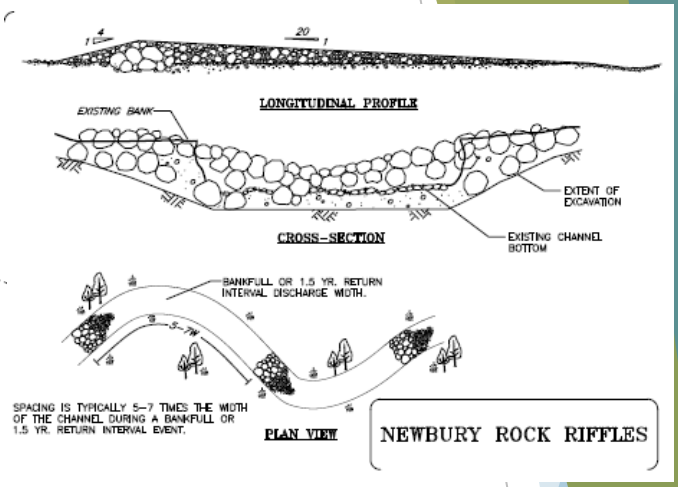

Combined Practice Project Detail

- Rock Riffle Construction

Combined Practice Project Detail

- Bank Reshaping
  - Expand cross sectional area to reduce velocity

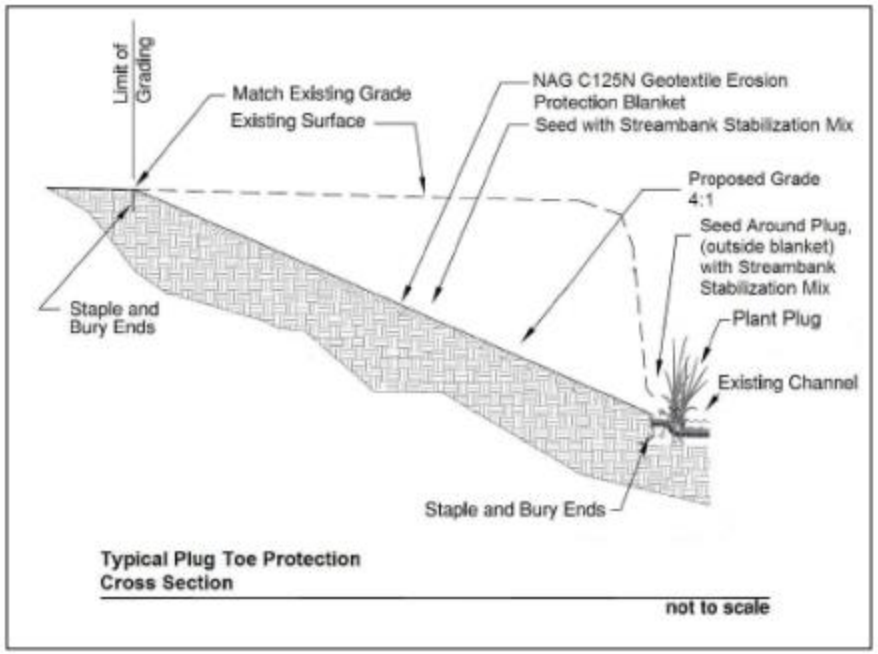

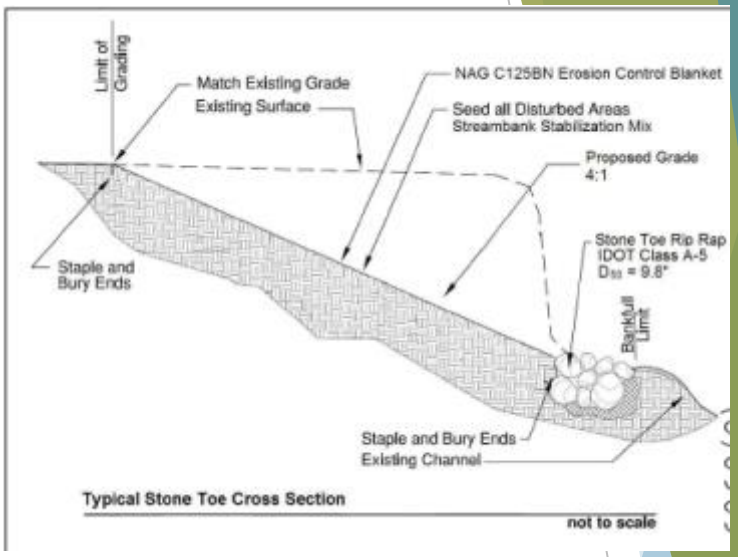

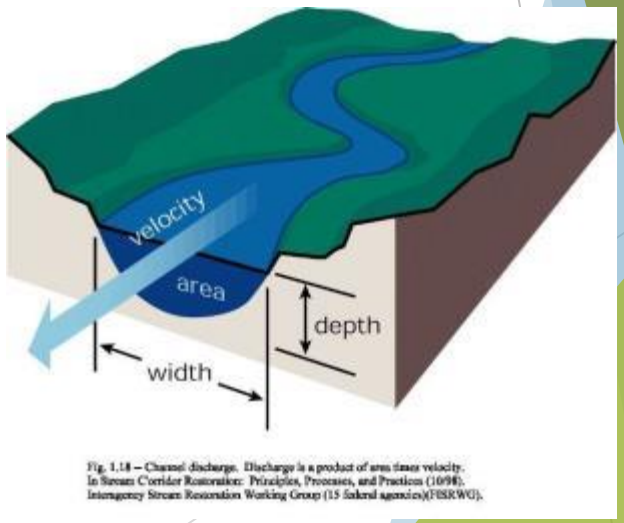

Fig. 1.18 – Channel discharge. Discharge is a product of area times velocity. In Stream Corridor Restoration: Principles, Processes, and Practices (10/98). Interagency Stream Restoration Working Group (15 federal agencies)(FISRWG).

Combined Practice Project Detail

- Bank Reshaping

Combined Practice Project Detail

- Bank Reshaping

Combined Practice Project Detail

- Toe Protection

Plug Toe

Stone Toe

Combined Practice Project Detail

- Vegetative Restoration
  - Establish native vegetation
  - Open streambanks to sunlight
  - Removal of woody invasives throughout riparian corridor

Combined Practice Project

Just under bankfull discharge

Conclusions

- Design and construction of streambank stabilization practices must take into account upstream and downstream conditions from the "treated" stream segment
- Practices may work well in some conditions but may not work well in others
- Experienced, interdisciplinary design and construction teams are necessary to ensure a successful project
- While ascetics of practices is important, it is of minor importance to the overall success of the project
- Hard and soft armoring of streambanks must be carefully selected based on the dynamics of the project
- Practices must suit observed and modeled conditions, don't select practices and then work backwards

Conclusions

- Take into account the longevity of the treatment options
  - If vegetation is my “final” stabilization practice, ensure that the selected plant mix suits the hydrology and sunlight regime of the project area
- Understand the project goals during design and construction
- Communication and coordination is critical to success of the project

Questions?

ENCAP INCORPORATED

Jonathan Koepke, CPESC, LEED-AP
Vice President, General Manager
ENCAP, Inc.
2585 Wagner Court
DeKalb, IL
(o) 815-748-4500
(c) 815-970-1671
www.encapinc.net
jkoepke@encapinc.net